

GENERAL NOTES:

1. COORDINATE THESE NOTES WITH THE CULVERT SPECIFICATIONS IN THE CITY OF PALM COAST TYPICAL RIGHT-OF-WAY RESIDENTIAL CULVERT INSTALLATION DETAIL.
2. BRICK PAVER UNITS SHALL HAVE AN ASPECT RATIO OF 3 OR LESS
3. SOIL SUBGRADE SHALL BE MINIMUM 6" LOOSE THICKNESS COMPACTED TO 95% PROCTOR DENSITY (PER ASTM D 1557)
4. ALL PAVERS SHALL HAVE EDGE RESTRAINTS AS DETAILED
5. BEDDING SAND SHALL BE 1" TO 1 1/2" DEEP, SCREENED AND COMPACTED AS PER ASTM C33 OR CSA-A23.1-FA1 GRADING REQUIREMENT
6. MASON SAND, STONE DUST OR WASTE SCREENINGS WILL NOT BE ACCEPTED
7. JOINTS BETWEEN PAVERS SHALL BE BETWEEN 1/16" AND 3/16" WIDE AND FILLED WITH JOINT SAND
8. AFTER PLACEMENT, PAVERS SHALL BE COMPACTED WITH A PLATE COMPACTOR HAVING A MINIMUM FORCE OF 5,000 LBS AND A FREQUENCY OF 75 TO 100 Hz
9. FINAL SURFACE ELEVATIONS SHALL NOT DEVIATE MORE THAN 3/8" UNDER A 10'-0" LONG STRAIGHT EDGE
10. ALL FUTURE REPAIR/REPLACEMENT OF PAVERS SHALL BE THE SOLE OBLIGATION OF THE PROPERTY OWNER. IN THE EVENT THAT RIGHT-OF-WAY WORK PERFORMED BY THE CITY OF PALM COAST REQUIRES REMOVAL OF PAVERS THE CITY WILL INSTALL NEW CONCRETE APRON SLAB. INSTALLATION OR REINSTALLATION OF PAVERS SHALL BE THE DONE AT THE PROPERTY OWNER'S EXPENSE. PAVERS SHALL BE REPLACED IN ACCORDANCE WITH CITY OF PALM COAST TYPICAL RIGHT-OF-WAY RESIDENTIAL CULVERT DETAILS

ALTERNATE 1 (SEE SECTION B-B)
5" CONCRETE OVER CULVERT w/1" - 1 1/2" BEDDING SAND AND 2 3/8" PAVERS

ALTERNATE 2 (SEE SECTION B-B)
ENCASE CULVERT IN CONCRETE AS PER DETAIL


EDGE RESTRAINT OPTIONS: COORDINATE w/SECTION C-C DWG # 3

OPTION 1 (SEE SECTION C-C)
2 3/8" THICK PAVERS WITH MIN 12" LIMEROCK OR CRUSH CRETE BASE

OPTION 2 (SEE SECTION C-C)
3 1/2" THICK PAVERS WITH MIN 8" LIMEROCK OR CRUSH CRETE BASE


IN ALL CASES BASE MATERIAL SHALL BE COMPACTED TO 98% MODIFIED PROCTOR (PER ASTM D 1557)


PAVER EDGE RESTRAINTS SHALL CONTINUE THE FULL LENGTH OF THE DRIVEWAY

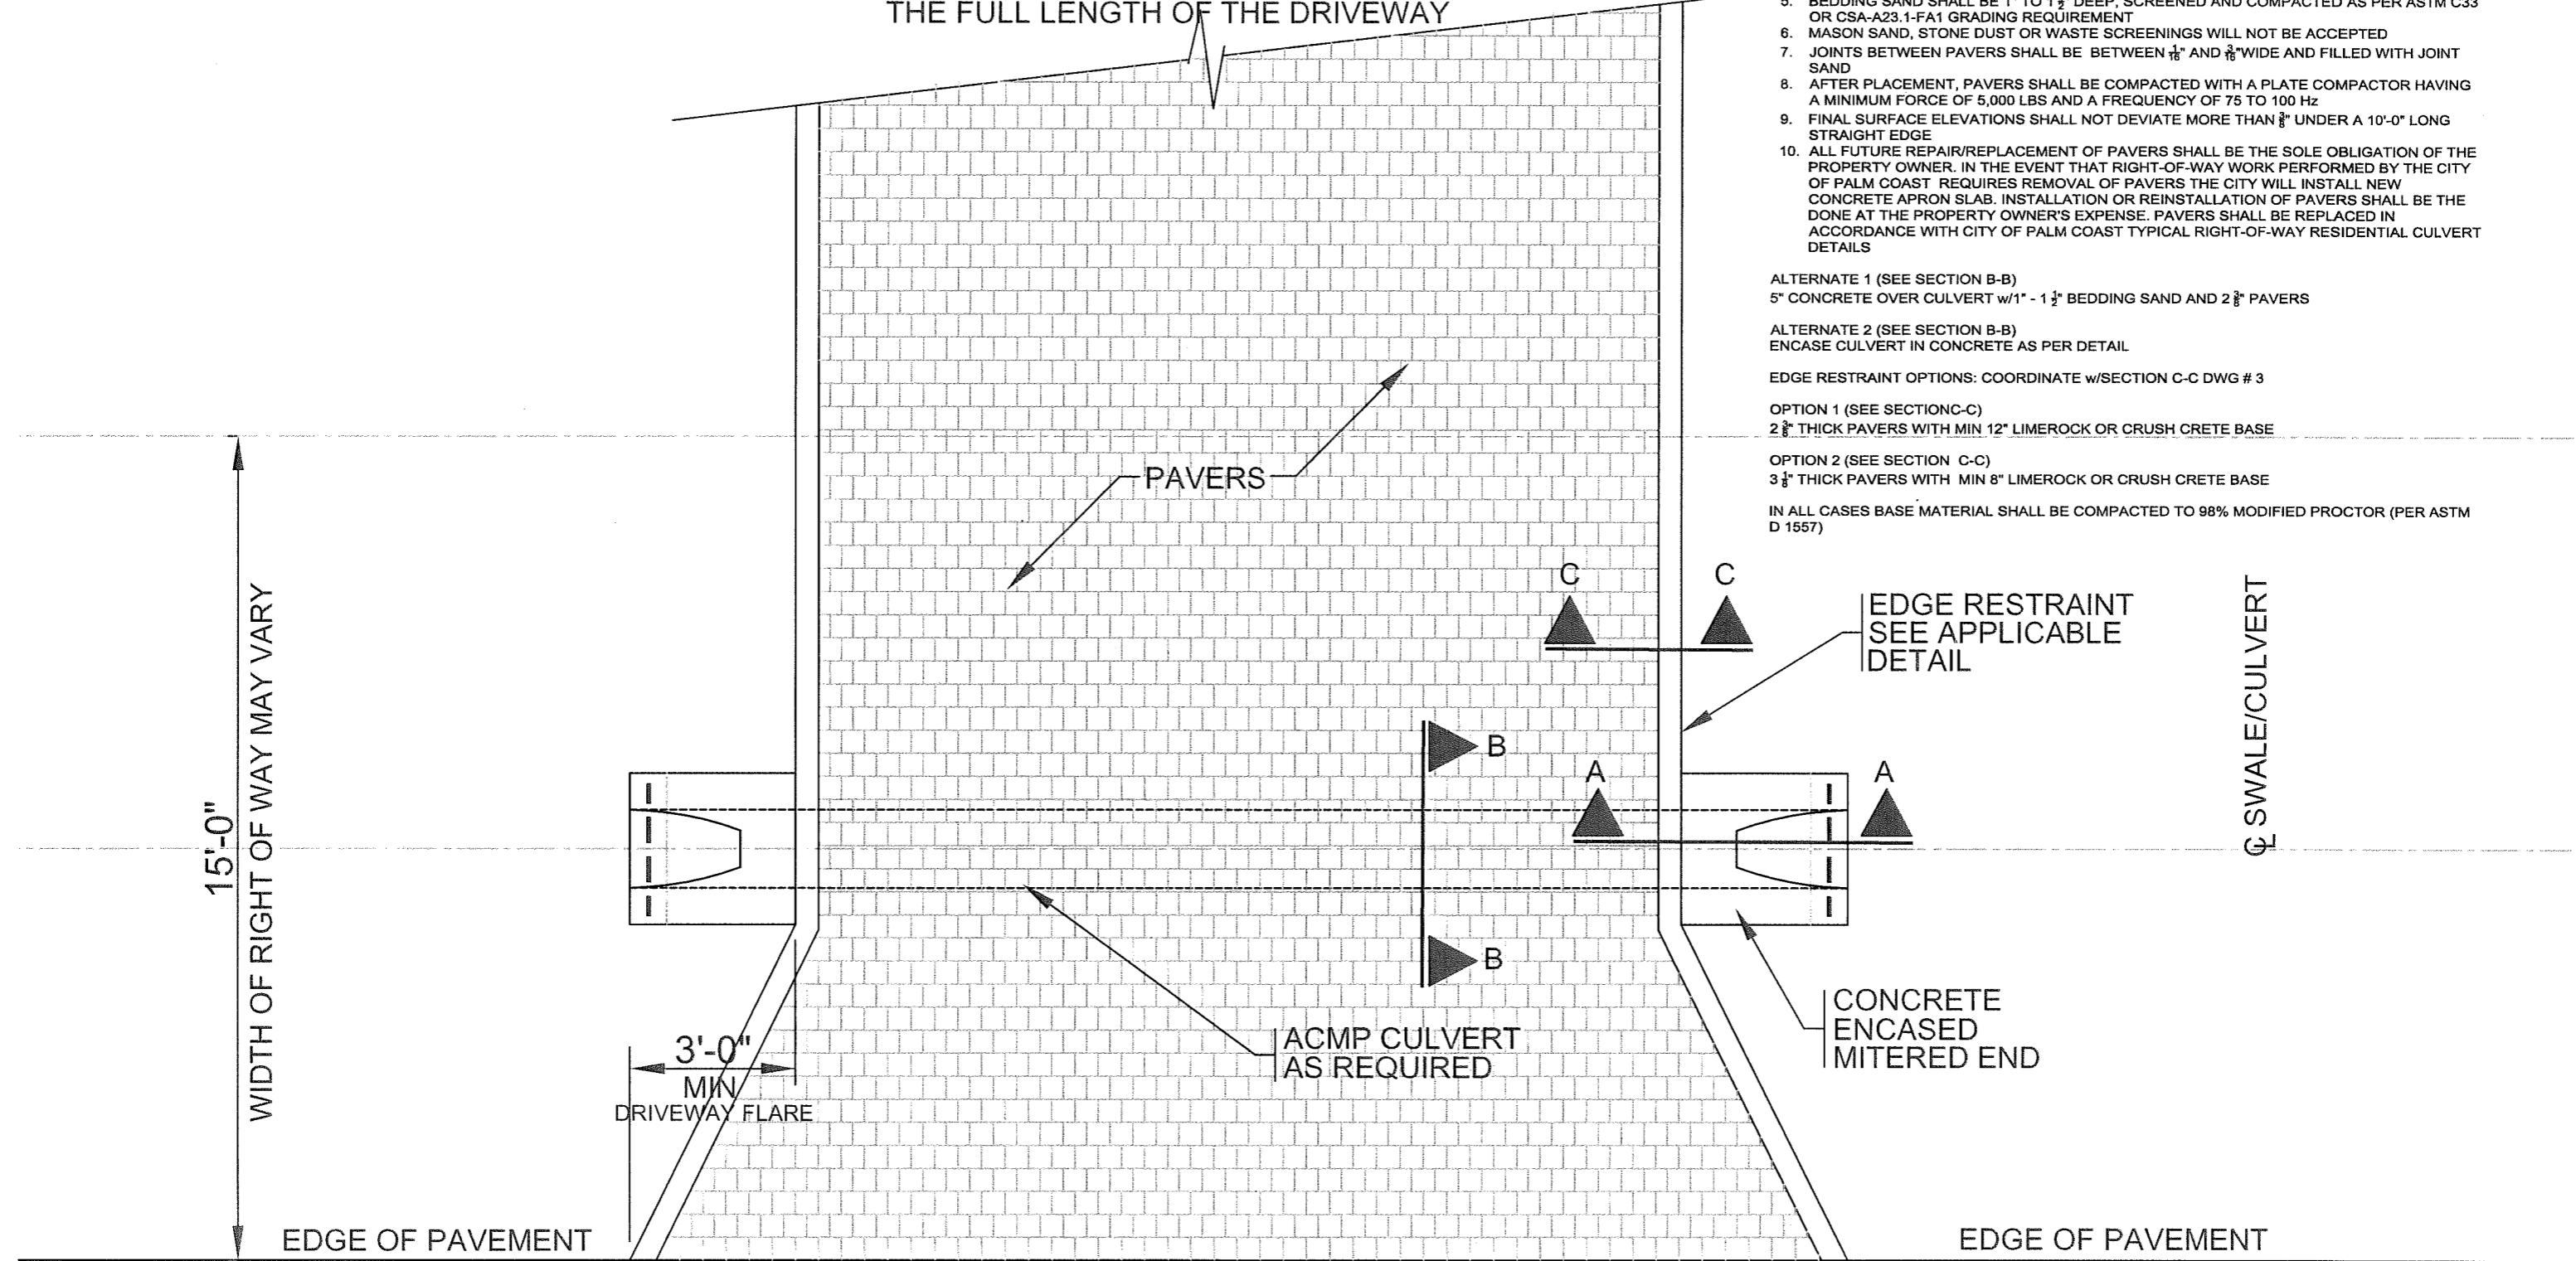


Residential Paver Driveway Detail

NO SCALE


Des. by:	Date:	Scale: NONE	Rev. No.	Date	App'd by	 CITY OF PALM COAST, FLORIDA 160 Cypress Point Parkway Suite B-106 Palm Coast, Florida 32164	Dwg. Status Final 5-22-2018	City Right Of Way Residential Driveway Paver Detail	Dwg No. 1 sheet 1 of 3
Dwn. by: TB	Date: 5-20-2018	Job no.:							
Chk. by:	Date:	File: Driveway Paver Detail							
App'd by: DJS	Date: 5-21-2018								

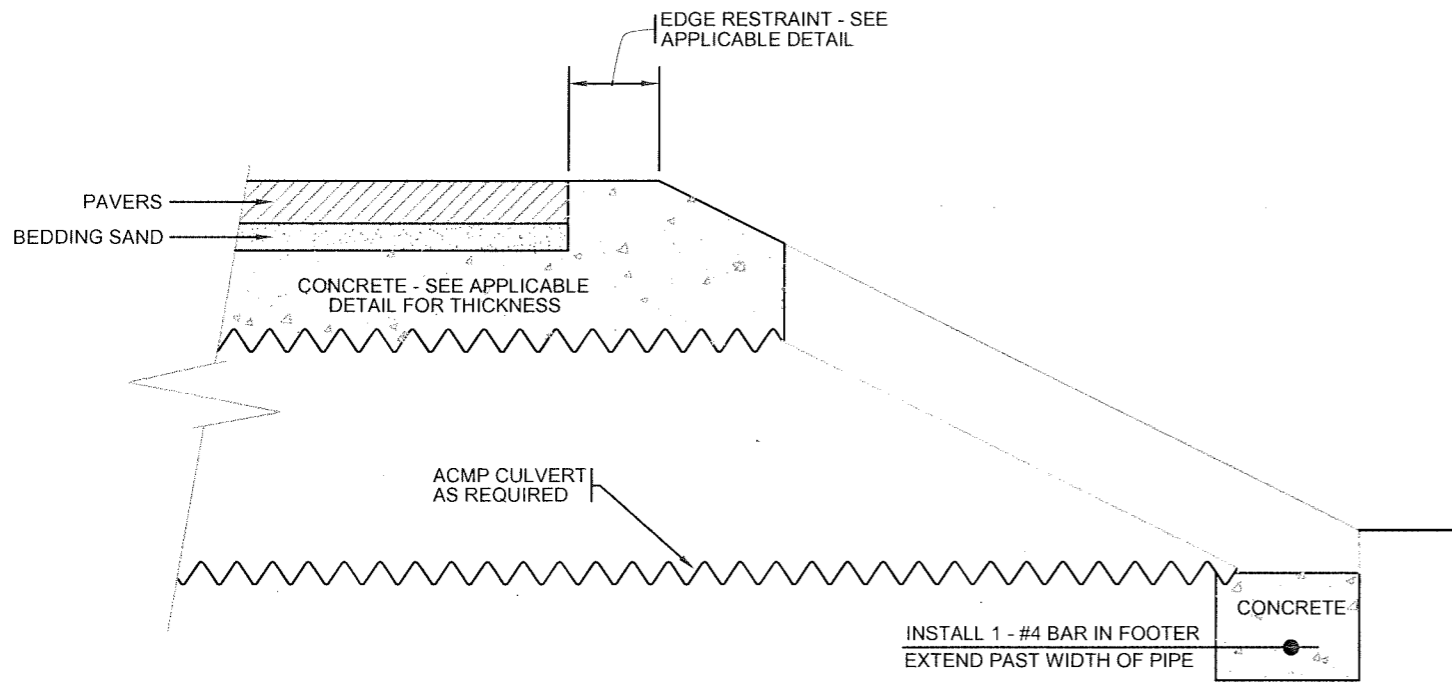

Detail A-A

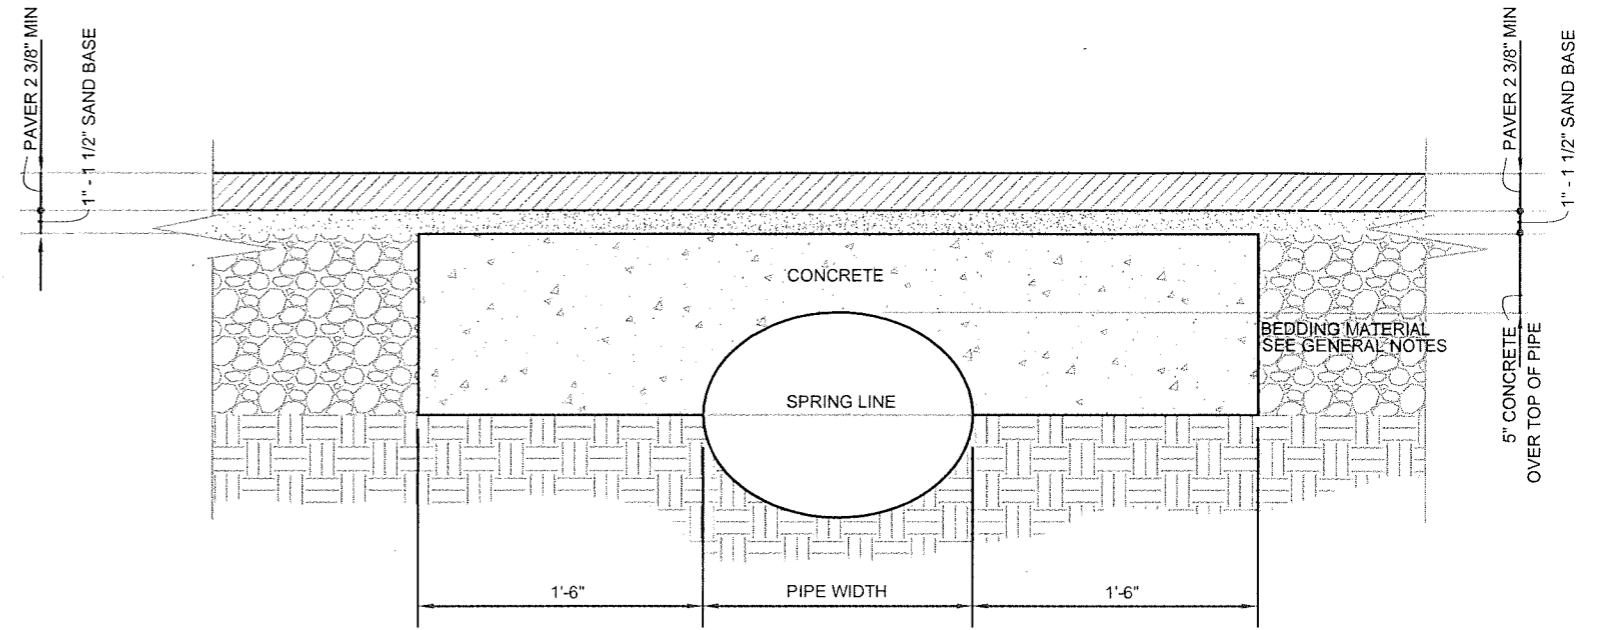

Detail B-B Alternate 1

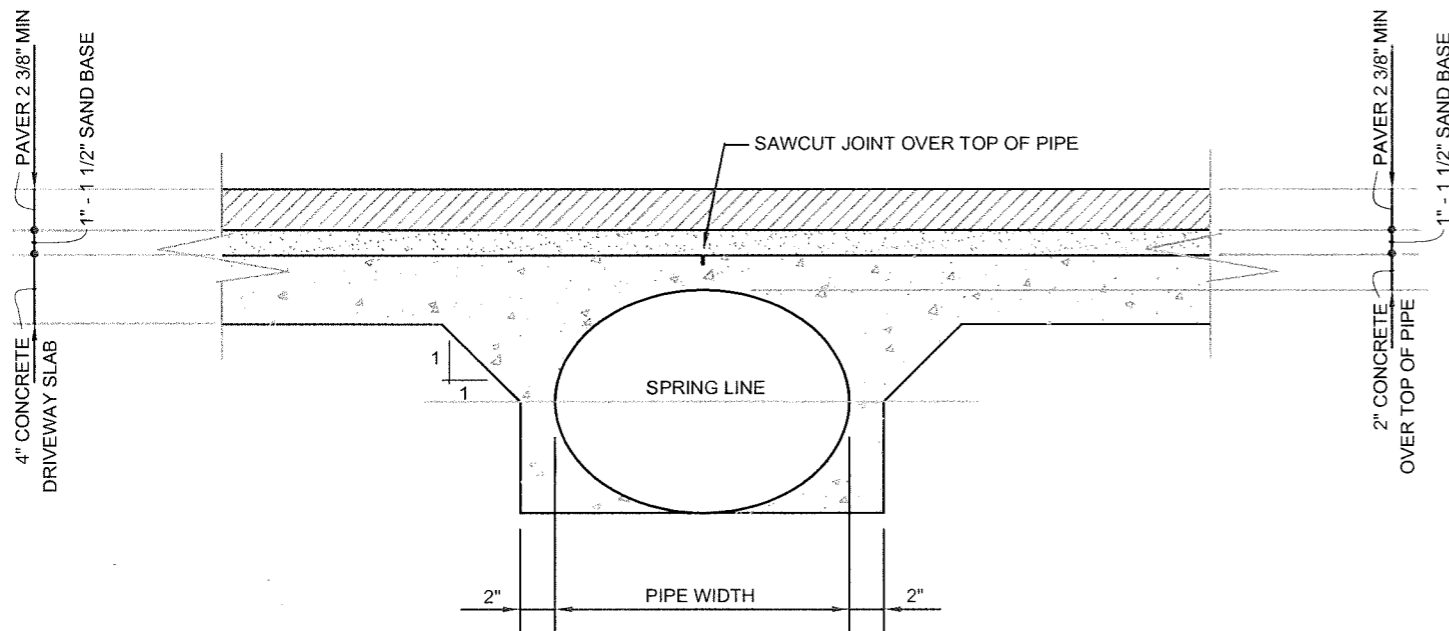

Detail B-B Alternate 2

Residential Paver Driveway Details

NO SCALE

Des. by:	Date:	Scale: NONE
Dwn. by: TB	Date: 5-20-2018	Job no.:
Chk. by:	Date:	File: Driveway Paver Detail
App'd by: DJS	Date: 5-21-2018	

Rev. No.	Date	App'd by

Dwg. Status
Final 5-22-2018




CITY OF PALM COAST, FLORIDA
160 Cypress Point Parkway
Suite B-106
Palm Coast, Florida 32164

City Right of Way
Residential Driveway Paver Detail


Dwg No.
2
sheet 2 of 3

Note: Paver restraint shall be constructed as shown within the right of way. A 4" curb will be accepted from edge of R.O.W. to house (contractor option)

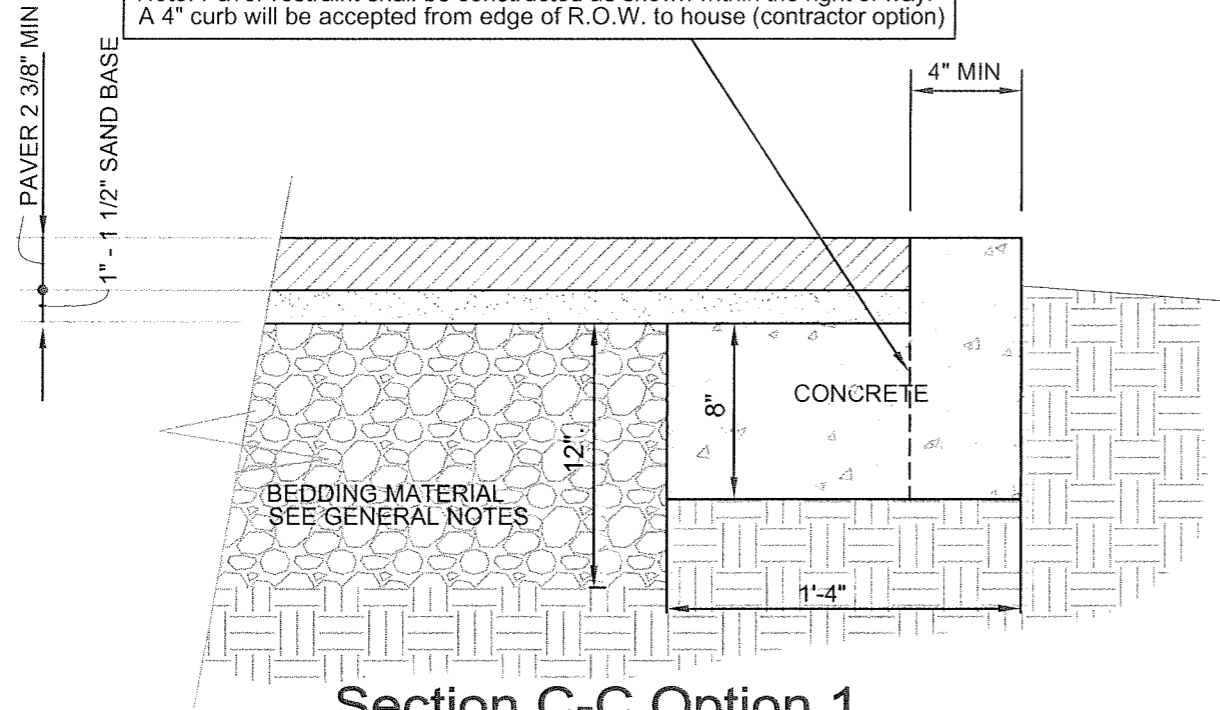


Section C-C Option 1


Note: Paver restraint shall be constructed as shown within the right of way. A 4" curb will be accepted from edge of R.O.W. to house (contractor option)

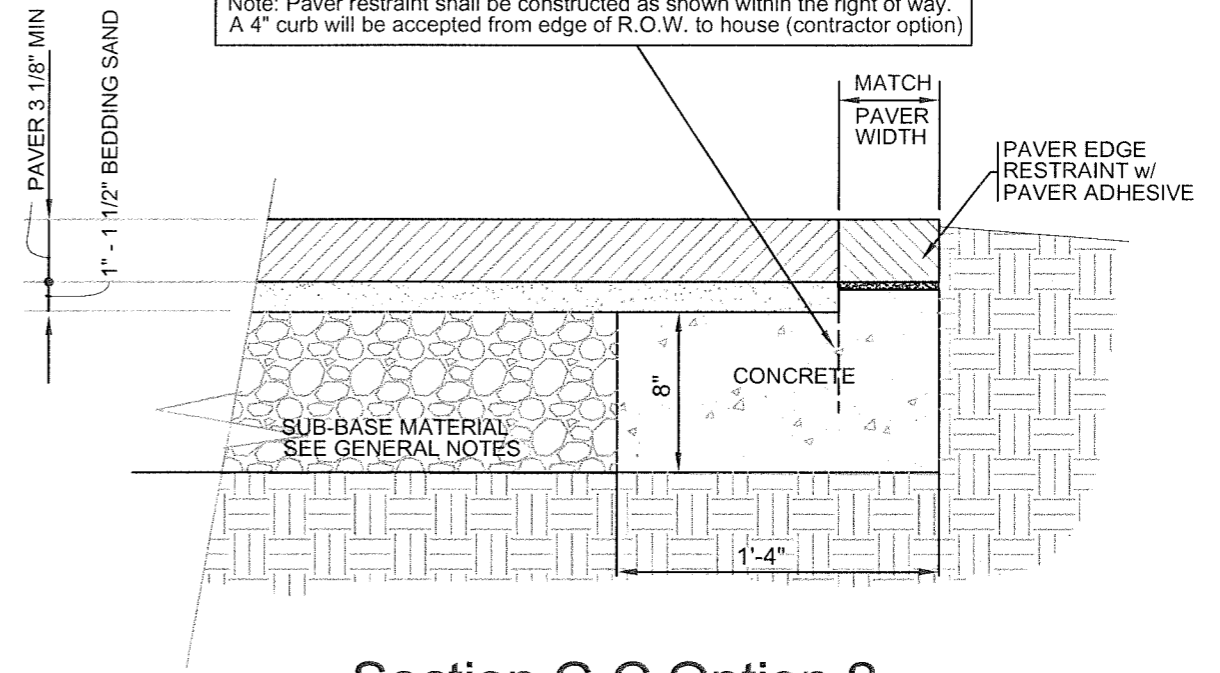

Section C-C Option 2

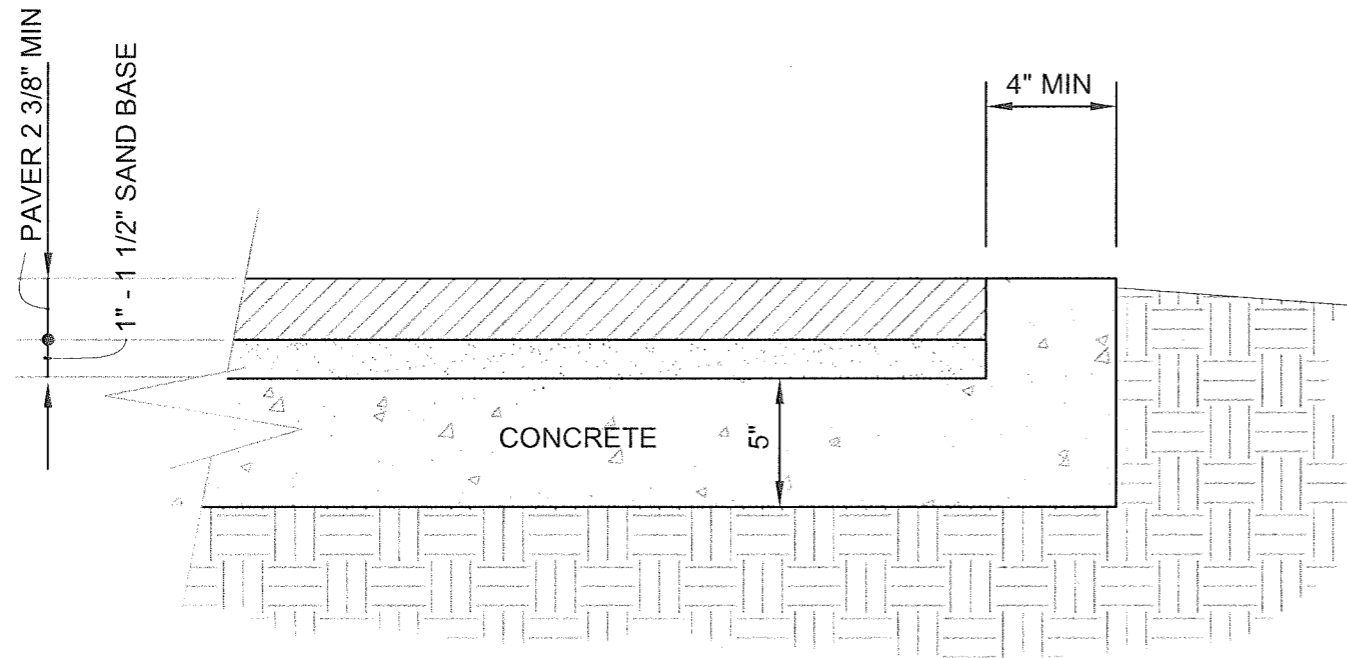


Section C-C Option 3A

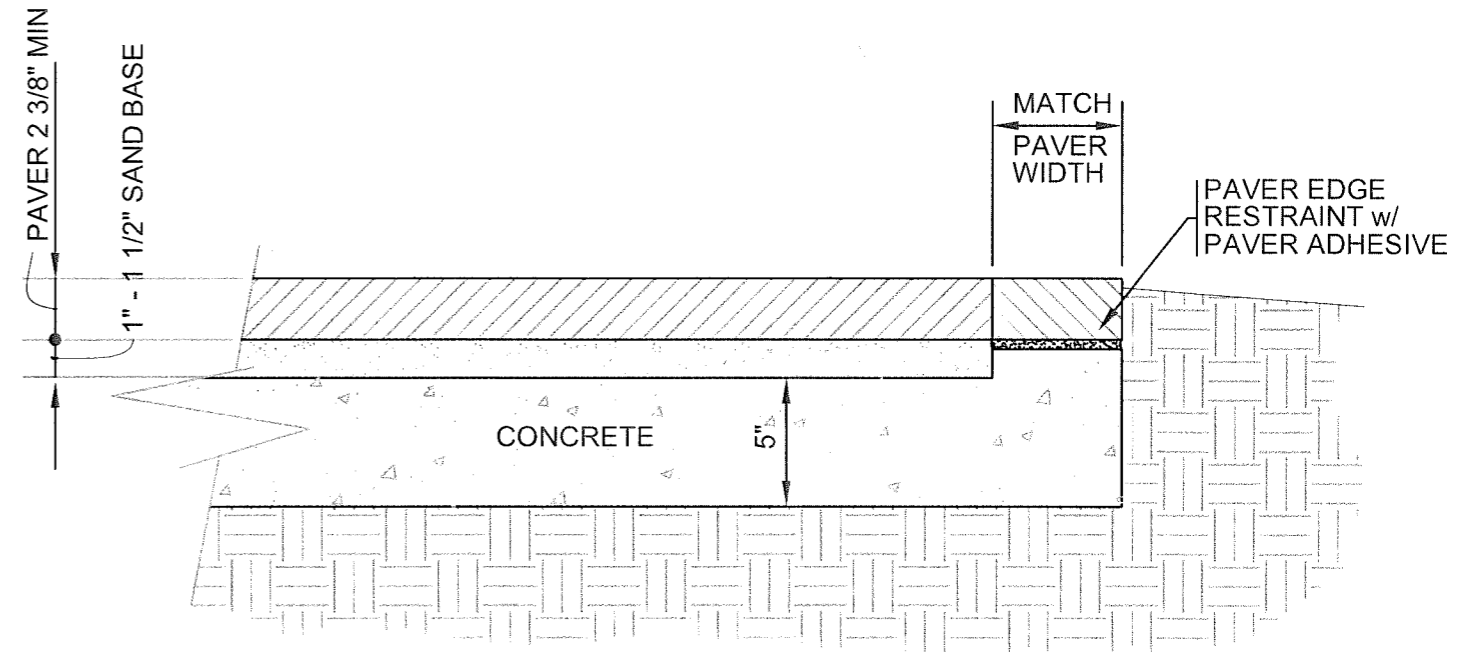

Section C-C Option 3B

Residential Paver Driveway Details

NO SCALE

Des. by:	Date:	Scale: NONE	Rev. No.	Date	App'd by		CITY OF PALM COAST, FLORIDA 160 Cypress Point Parkway Suite B-106 Palm Coast, Florida 32164	City Right of Way Residential Driveway Paver Detail	Dwg No. 3 sheet 3 of 3
Dwn. by: TB	Date: 5-20-2018	Job no.:							
Chk. by:	Date:	File: Driveway Paver Detail							
App'd by: DJS	Date: 5-21-2018								

Dwg. Status
Final 5-22-2018